

Research Journal of Pharmaceutical, Biological and Chemical Sciences

The Heterogeneous Catalyzed Oxidation in the Liquid Alkaline Medium of 2,6-di-*tert*-butylphenol into 3,3',5,5'-tetra-*tert*-butyl-4,4'-diphenquinone.

Renat Akhmadullin^a, Dinar Gatiyatullin^a, Alfiya Akhmadullina^b, Lev Verizhnikov^b,
Natalya Mukmeneva^a, Ludmila Lapteva^c, and Vitaly Ovchinnikov^{d,*}

^a Department of Technology of Synthetic Rubber, Kazan National Research Technological University, St-K.Marks 68, Kazan, Tatarstan, Russia;

^b Entrepreneur (R&D "AkhmadullinS – Science and Technology"), St-Fuchika 44, Tatarstan, Russia, Kazan, Tatarstan, Russia;

^c Department of Chemistry and Ecology, Kazan State University of Architecture and Engineering, St-Zelionaya 1, Kazan, Tatarstan, Russia;

^d Department of General Chemistry and Ecology, Kazan National Research Technical University named after A.N.Tupolev – KAI, St-K.Marks 10, Tatarstan, Russia.

ABSTRACT

An effective alkaline catalyst POC (phenols oxidation catalyst) for 2,6-di-*tert*-butylphenol oxidation is considered. The composition of new heterogeneous catalytic system and the speed of oxidation reactions of 3,3',5,5'-tetra-*tert*-butyl-4,4'-diphenquinone synthesis with the use of this catalyst have been studied.

Keywords: 2,6-di-*tert*-butylphenol, 3,3',5,5'- tetra-*tert*-butyl-4,4'- diphenquinone, 3,3',5,5'-tetra-*tert*-butylbiphenyl - 4,4'-diol, alkaline catalysis, base, sulfur organic compounds oxidation products, phenol with room substituent.


*Corresponding author

INTRODUCTION

The international important and pertinent scientific and technical purposes today it is the maximal intensification of processes, the improvement of ecological component of their production, as well as the low-waste development of technologies. The existing and emerging technologies of stabilizers production are also among those tasks. At present, we have the high level of modern requirements for the environmentally safe production and use of organic and high molecular substances (EU REACH regulations), on the toxicity (list of carcinogenic hazardous substances IARC). So, they assume a wider range of phenol antioxidants application replacing on the whole efficient, but more toxic antioxidants with the nitrogen contents [1]. The compounds of the substituted phenols class have a low toxicity and high levels of antioxidant activity. Therefore, they are approved for the use in the products for the medical and food industries [2].

The antioxidant 3,3',5,5'-tetra-*tert*-butylbiphenyl-4,4'-diol (hereinafter will be referred as bisphenol (I)) and its intermediate product 3,3',5,5'-tetra-*tert*-butyl-4,4'-diphenoquinone (hereinafter will be referred as diphenoquinone (II)) [3] perform great theoretical and practical interest. The efficiency of their use and the mechanism of their action as antioxidants for general-purpose synthetic rubber such as SKI-3, PBR, etc [4, 5] were shown in the previous studies. The possibility of their use in medicine [6-12], for polyolefins stabilization [13-17], as well as for the oils stabilization [18-20] is known also.

Earlier studies testify that the oxidation of 2,6-di-*tert*-butylphenol (hereinafter will be referred as monophenol (III)) by oxygen in alkaline medium go through the anion-radical mechanism (known as single-electron transfer) till the formation of diphenoquinone (II) (Scheme 1) [21-23].

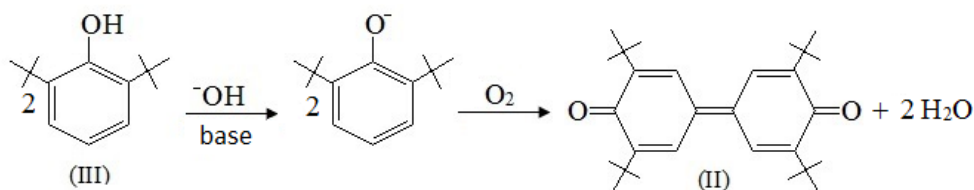

Scheme 1: The transformation of monophenol (III) oxidation with oxygen to diphenoquinone (II)

The main disadvantages of the phenols oxidation in alkaline medium are the insufficiently high oxidation rate and the deficiency of effective method for the alkali regeneration. That causes to the necessity of its subsequent neutralization with acid. This leads to the continuous spending of alkali and acid, the formation of large amount of wastewater, the increase in the working costs and the metal consumption in the manufacturing an antioxidant, just as ecological pollution.

The problems and prospects of the use of diphenoquinone (II) and the above mentioned bisphenol (I) it represents the big interest to continue researches concerning development of effective and low-waste technologies for their synthesis [21, 24-33].

EXPERIMENTAL SECTION

Materials, physical measurements and oxidation of monophenol (III)

The cylindrical bubbler type reactor (Fig. 1) is loaded with 50.0 ml of toluene, 4.5 g (0.022 mol) of monophenol (III) and 0.5 g (0.0012 mol) of diphenoquinone (II). Upon reaching the predetermined temperature (85° C), the catalyst is injected into the reactor and oxygen is supplied at a flow rate of 500 hr⁻¹. The rotation speed of the magnetic stirrer is set on 1400 rpm.

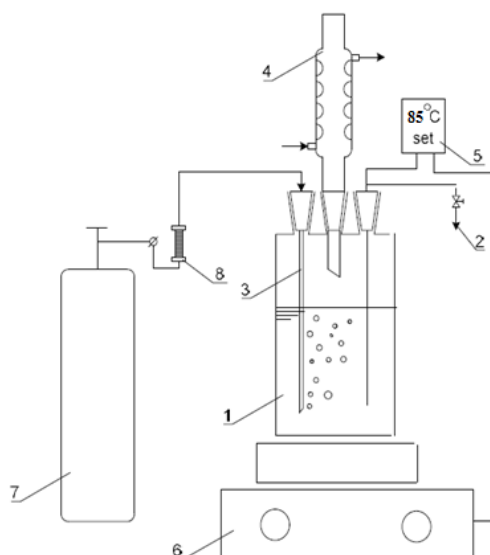


Figure 1. Apparatus for liquid phase oxidation of monophenol (III) with oxygen

The glass cylindrical vessel (1) with 100 ml capacity, equipped with a sampler (2), the gas supply tube (3), the reflux condenser (4) and the temperature control system EKT Hei-Con (5), was used as a reactor. The reaction mixture in the reactor was heated and stirred using magnetic stirrer MR Hei-Standard of Heildolf Company (6). Oxygen was fed into the reactor from a balloon (7), the flow rate was regulated by a valve on the flow meter readings (8). The kinetic curves plotting of diphenoquinone (II) accumulation was performed by photocolourimetry on Ekros PE5300V spectrophotometer at the wavelength of $\lambda = 540$ nm, according to the light absorption data of diphenoquinone (II) solution.

There were two layers in the reactor after the completing of oxidation and sedimentation. The top layer (hydrocarbon phase) was separated from the lower layer (liquid catalyst) at a temperature over 70°C . The chromatography-mass spectrometry analysis has been carried out on the instrument GCMS 2010 Plus Shimadzu (Japan) to determine the composition of catalyst POC. The ionization method was an electronic ionization. The ion source temperature is 220°C . A capillary column Slb-5ms «Supelco» with the length of 30 m and diameter equal to 0.32 mm; the phase layer thickness-0.32 microns was used. The gas carrier is helium. The chromatograms obtaining conditions are the following: injector temperature is 280°C ; helium flow rate through the column is 1.42 ml / min; flow division (split) is 1:3. The initial temperature of the column was 80°C (2 minutes); the thermostat heating rate was $10^{\circ}\text{C}/\text{min}$; the final temperature was 280°C .

The preparation for chromatography-mass spectrometry analysis of POC catalyst was carried out as follows: the liquid alkaline catalyst POC was neutralized with 5% sulfuric acid to pH 7, then the water was evaporated at 95°C . The obtained saline solution was mixed with methanol and filtered off from precipitated salts in order to extract polar compounds and separate inorganic salts. Methanol was evaporated and the filtrate was analyzed. The identification of the components was performed by using a mass spectra library NIST-11.

The determination of the quantitative content of components in the reaction mass was carried out by gas chromatograph Chromatec (Crystal 5000). The mode is start channel-1: stand-by time is [0 min], analysis time is [60 min]. PID-1: temperature is [320°C], hydrogen consumption (RRG-5) is [25 ml/min], the air consumption (RRG-6) is [250 ml/min]. The thermostat: column-1 temperature is [180°C , 1 min, 1 C/min, 200°C , 0 min]. The gas carrier pressure (RRG-4 Helium) is [30.822 kPa, 0 min], the gas carrier flow (RRG-4 Helium) is [10 ml/min, 0 min], the gas carrier speed (RRG-4 Helium) is [102.102 cm/sec, 0 min]; the evaporator-2 has temperature as 300°C , 0 min.

The following reagents were used: 1) 2,6-di-*tert*-butylphenol) grade A TU 38.103378-86 (TU-technical conditions); 2) potassium hydroxide (AR grade) GOST 24363-80; 3) dimethylsulfoxide Sigma-Aldrich 99.7%; 4) dimethylsulfone Sigma-Aldrich 98%; 5) toluene technical GOST 14710-78; 6) industrial oxygen in cylinders GOST 5583-78; 7) argon technical in balloons GOST 10157-79.

RESULTS AND DISCUSSION

The investigated catalyst POC is a waste 30% alkaline product of the heterogeneously catalyzed butane fraction sweetening at "LUKOIL-Nizhegorodnefteorgsintez" Ltd. [34]. This alkaline catalyst consists of the sulfur oxidation products and products extracted with alkaline solution from straight-run gasoline fraction. The use of the proposed catalytic system, due to its good delamination, in the oxidation reactions of monophenol (III), allows to separate reaction mixture and the catalyst until the temperature of diphenoquinone (II) crystallization. Therefore, that permits to exclude from the synthesis scheme an environmentally uncomfortable step of neutralizing alkaline catalyst in the reaction mixture.

Determination of the POC catalyst composition was carried out by chromatography mass spectrometric analysis (Fig. 2) of products extracted with methanol. Oxygen containing sulfur organic compounds, namely methyl-methane-thiosulfonate, dimethylsulfone, dimethylsulfoxide etc., were send away from composition of POC catalyst (Table 1).

Table 1: The compounds extracted from POC catalyst

Number of peak	Compounds	compound retention time, min
1	Ethanol	1.32
2	Acetic acid	1.61
2	Propionic acid	1.65
3	1,2-Dihydroxyethane	1.81
4	1,3-Dihydroxypropane	1.95
5	Dimethylsulfoxide	2.57
6	Dimethylsulfone	3.21
9	Methyl ester of methane sulfonic acid	4.25
10	Ethylmethylsulfone	4.35
12	Methyl-methane thiosulfonate	5.24
13	5-Oxohexanoic acid	5.93

On the basis of the compounds, extracted from POC catalyst (Table 1), can suppose that the products of extensive oxidation of sulfur compounds in hydrocarbons, could serve as a catalysts in the process of oxidation reaction of monophenol (III) to diphenoquinone (II).

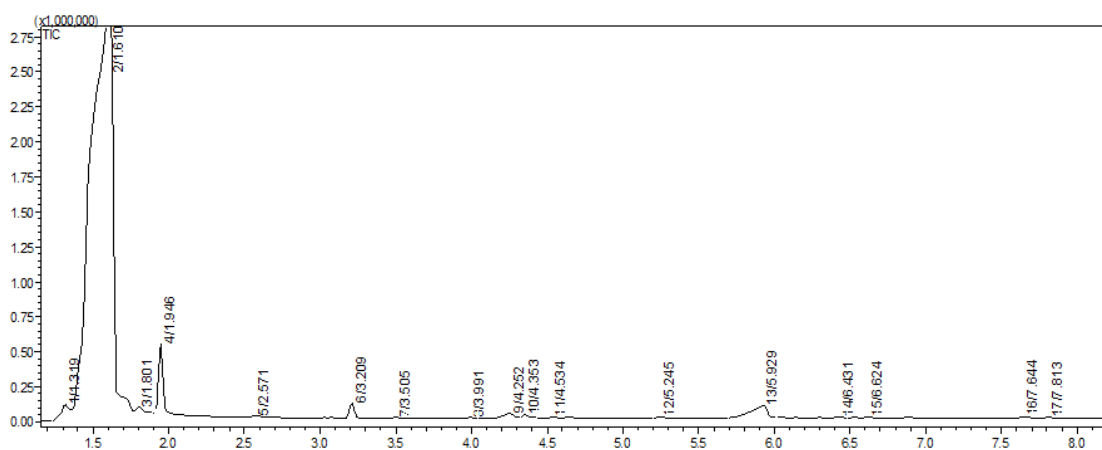


Figure 2: The chromatography of the extract from POC catalyst, performed by the mass spectrometric analysis

The experiments with pure aqueous potassium hydroxide solutions (Fig. 3) were carried out to compare the efficiency of the proposed catalyst POC. Potassium hydroxide was chosen as an alkaline agent due to its use in the installations of butanes desulfurization [34].

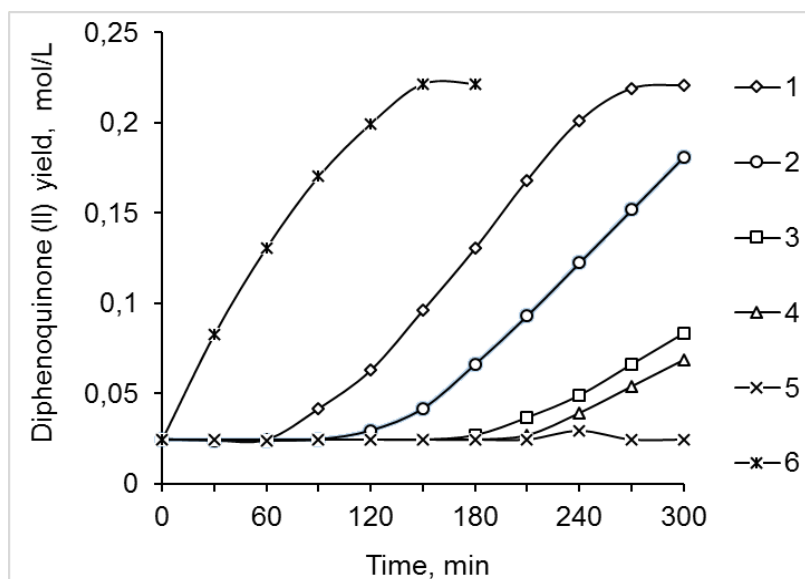


Figure 3: The dependence of diphenoquinone (II) yield on the concentration of aqueous potassium hydroxide solution: 1 – 1.0 ml 60% KOH, 2 – 1.0 ml 50% KOH, 3 – 1.0 ml 40% KOH, 4 – 1.0 ml 30% KOH, 5 – 1.0 ml 20% KOH, 6 – 1.0 ml POC

Figure 3 shows that the yield of the product of oxidation reaction of monophenol (III) essentially depends on the concentration of alkaline solution: the higher is the concentration, the higher is the yield. Thus, 60% aqueous solution of potassium hydroxide has the best catalytic activity out from the chosen alkaline solutions and has a minor activity comparing with the proposed catalyst POC. To select an optimal ratio of alkaline solution to toluene - monophenol (III) mixture we studied the dependence of diphenoquinone (II) yield on the amount of 60% aqueous potassium hydroxide solution (Fig. 4) at a constant volume of toluene equal to 50.0 ml. The obtained data detect the maximum activity in the ratio 0.5 ÷ 1.0 parts of alkaline solution to 50.0 of toluene solution. We get maximum contact surface of the phases at the certain ratios of aqueous alkaline solution to toluene, under the vigorous stirring. The further increase of amount of alkaline solution lead to the particle agglomeration of aqueous alkaline phase and decrease the interphase surface as a consequence.

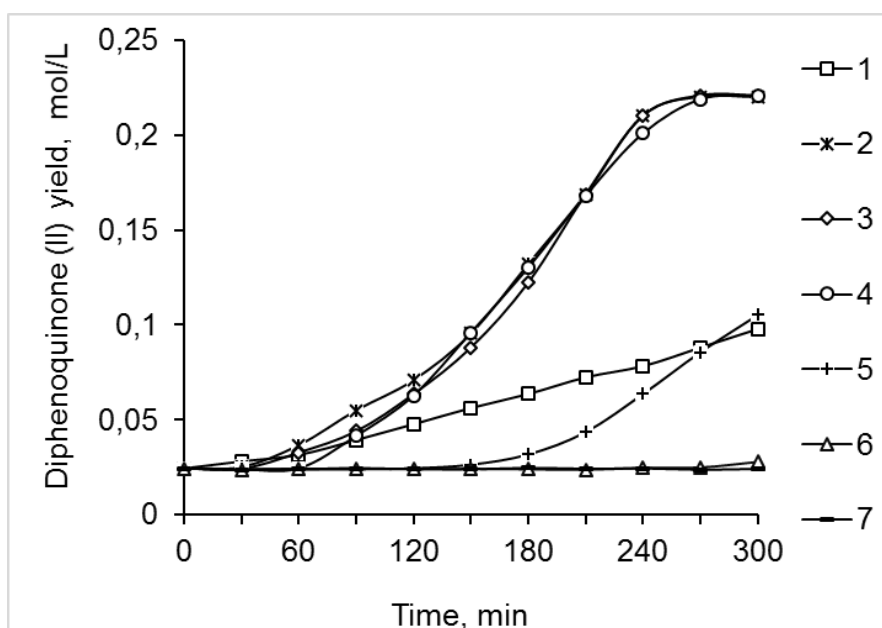


Figure 4: The dependence of diphenoquinone (II) yield on the amount of 60% aqueous potassium hydroxide solution in the reaction mixture: 1 – 0.25 ml 60% KOH, 2 – 0.5 ml 60% KOH, 3 – 0.75 ml 60% KOH, 4 – 1.0 ml 60% KOH, 5 – 1.5 ml 60% KOH, 6 – 2.5 ml 60% KOH, 7 – 5.0 ml 60% KOH

The investigation of the influence of the proposed catalyst POC amount at the monophenol (III) oxidation reaction showed that the reaction has no induction period (Fig. 5). Moreover, the increase of the catalyst amount showed the rise of the initial oxidation rate.

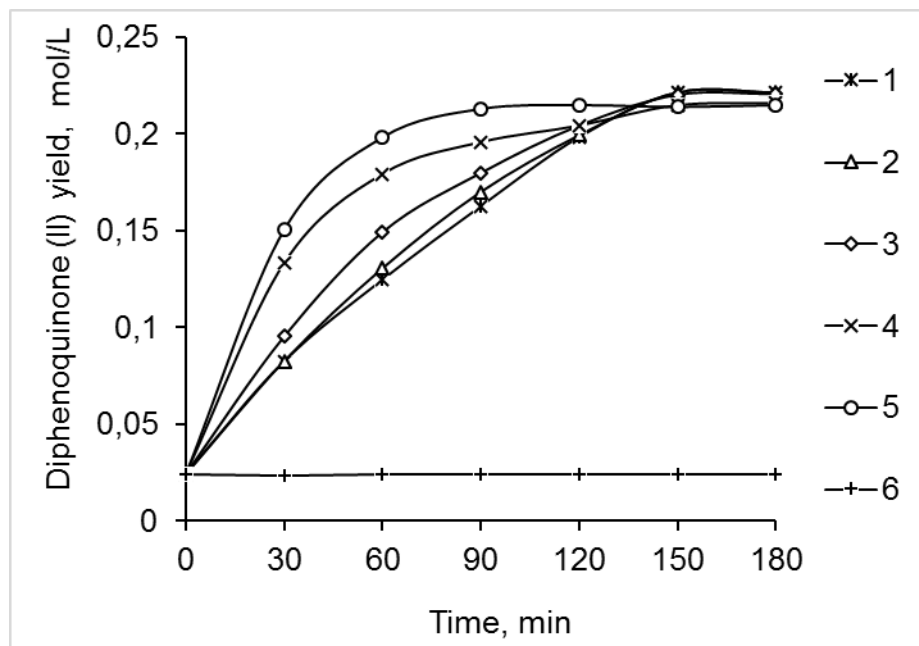


Figure 5: The effect of POC catalyst amount on the oxidation rate of monophenol (III): 1 – 0.5 ml POC, 2 – 1.0 ml POC, 3 – 1.5 ml POC, 4 – 2.5 ml POC, 5 – 5.0 ml POC, 6 – 5.0 ml 60% KOH

The deficiency of the induction period in presence of POC as compared with pure alkali solutions, can most likely be explained by the presence of oxygenated sulfoxides and sulfones in POC catalyst, where the oxygen activity is higher the activity of molecular oxygen due to the formation of methyl sulfonium ion [35]. The absence of the dependence from the amount of POC catalyst, as it was in the case of the aqueous 60% alkaline solution, is presumably explained by the presence of surfactants such as potassium salts of organic acids in POC catalyst, identified by chromatography mass spectrometric analysis (Table 1). The surfactants, which increase the interphase interaction of the air, the aqueous alkaline, and hydrocarbon phases in the heterogeneous mixture of reaction. The reaction mixture analysis data (Table 2), obtained by gas chromatography earlier and after oxidation of monophenol (III) in the presence of 60% aqueous potassium hydroxide and POC catalyst, showed that in the oxidation process of the monophenol (III) in presence of POC conversion is not less than 98.4%. The selectivity of diphenoquinone (II) is 85-90%, of 2,6-bis(*tert*-butylphenol)-1,4-benzoquinone (hereinafter will be referred as 2,6-benzoquinone (IV)) is about 5% and of bisphenol (I) is up to 10%. Necessary to note, that in the presence of POC catalyst the maximum conversion of monophenol (III) is achieved much faster than that for aqueous 60% KOH solution.

Table 2: Quantitative content of the initial components and the resulting products of the oxidation reaction of monophenol (III) in presence of 60% aqueous potassium hydroxide and POC catalyst

Component	catalyst POC		catalyst - 60% KOH	
	0 min	150 min	0 min	300 min
	concentration, mg/dm ³			
monophenol (III)	1026.5	0.8	1020.0	12.3
2,6-benzoquinone (IV)	5.2	49.1	3.8	47.9
2,4-di- <i>tert</i> -butylphenol	4.9	4.9	4.3	4.7
diphenoquinone (II)	108.7	983.1	112.5	1012.4
bisphenol (I)	7.2	110.9	5.7	66.9

We studied the effect of the individual sulfur compounds of POC, dimethylsulfoxide (DMSO) and dimethylsulfone (DMS), to determine the reason of the accelerating action of POC catalyst at the oxidation process of monophenol (III) (Fig. 6).

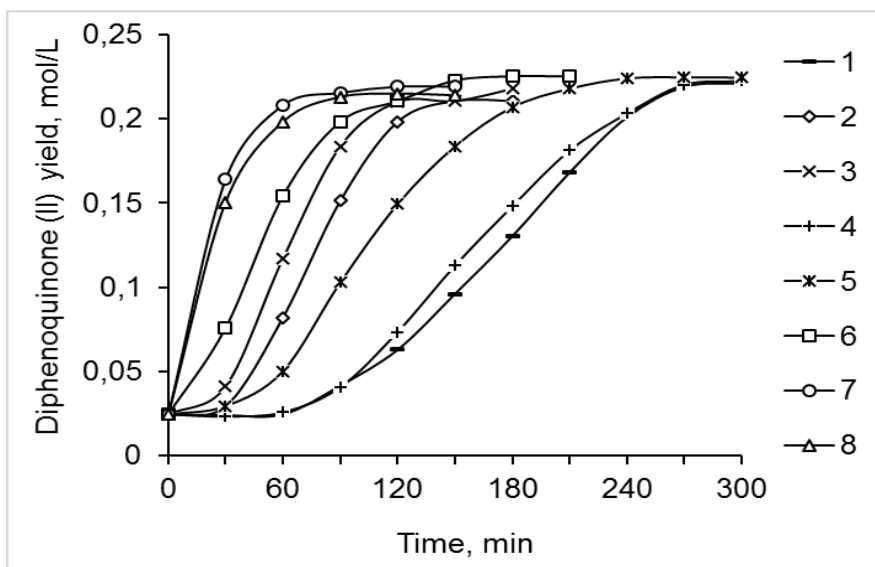


Figure 6: The influence of the amount and type of sulfur organic compounds, including the 1.0 ml of 60% aqueous potassium hydroxide on the speed rate of monophenol (III) oxidation: 1 - reaction with the adding only 1.0 ml 60% KOH, 2 - 0.25 ml DMSO, 3 - 0.5 ml DMSO, 4 - 0.1 g DMS, 5 - 0.5 g DMS, 6 - 1.0 g DMS, 7 - 0.5 ml DMSO and 1.0 g DMS, 8 - 5.0 ml POC (without extra addition of the alkaline solution)

The initial speed rate of reaction demonstrate in the model systems, that the individual components (dimethylsulfoxide or dimethylsulfone) catalyze oxidation in aqueous 60% KOH, but their activity is lower than POC catalyst. Therefore, the special reaction has been carried out in presence of both components contained in the catalyst, thereby bringing the composition of the model alkaline solution closer to the composition of POC catalyst. As seen from Fig. 6, the insertion of both components into the reaction mixture simultaneously leads to a greater acceleration of the reaction, comparable to the speed rate of oxidation in the presence of POC catalyst.


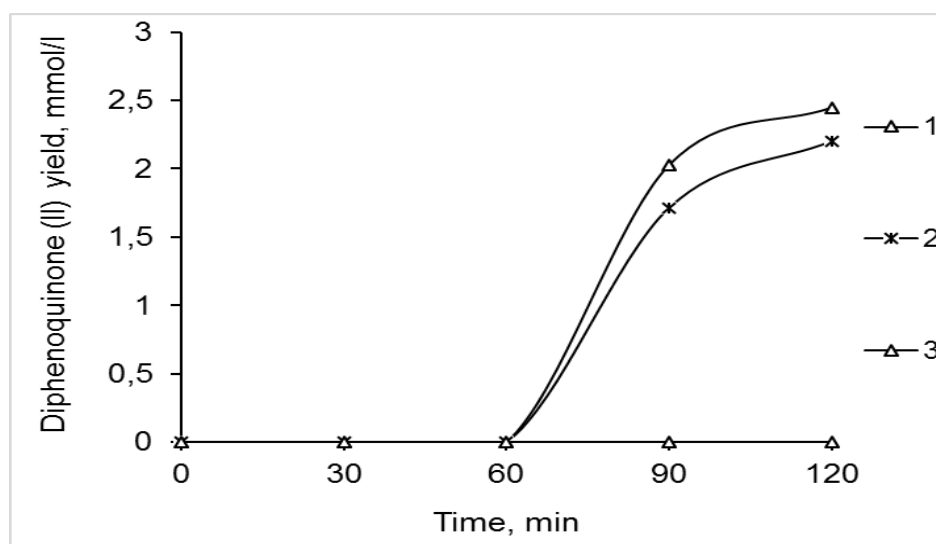


Figure 7: The influence of 0.007 mol of dimethylsulfoxide (1 - 0.5 ml DMSO) and 0.007 mol of dimethylsulfone (2 - 0.66 g DMS) and aqueous 60% potassium hydroxide on the speed rate of the oxidation of monophenol (III) under argon flow

It is known that dimethylsulfoxide is an effective oxidizing agent in the presence of the bases, including the oxidation processes of primary and secondary alcohols [35-37]. At the same time necessary to remember, that sulfones are characterized by high chemical and thermal stability, they are resistant to the oxidation and their transformations into sulphides is occur with difficulty [38]. We showed experimentally that the oxidation of monophenol (III) with dimethylsulfoxide and dimethylsulfone in the argon atmosphere does not occur without the add of alkali during of the first 60 minutes of reaction (Fig. 7).

However, the addition of 1.0 ml of 60% KOH on the 60-th minute leads to the beginning the oxidation reaction of monophenol (III) in absence of oxygen. In presence of dimethylsulfoxide the reaction speed rate is slightly higher than in presence of dimethylsulfone. This shows that in presence of a strong alkaline, due to the formation of phenoxyl-anion, the single electron transfer might occur also with dimethylsulfone. It is evidence of the possibility of oxidation of monophenol (III) in the absence of oxygen.

On the basis of obtained data the following reaction scheme can be assumed. In the first stage the phenoxyl-anion is formed in the presence of base (Scheme 2). Then, in the presence of dimethylsulfoxide a single electron transfer proceeds, forming phenoxyl-radical, which undergoes to dimerization process into bisphenol (I). According to the same scheme bisphenol (I) oxidized until the diphenoquinone (II).

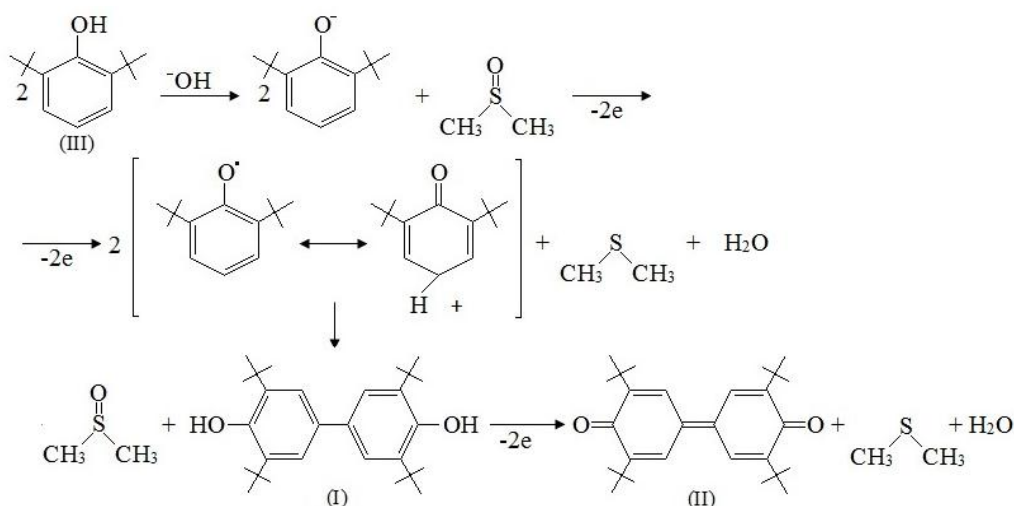

Scheme 2: Scheme of oxidation of monophenol (III) to diphenoquinone (II) with dimethylsulfoxide in alkaline medium via formation of bisphenol (I)

CONCLUSION

An effective catalyst POC for 2,6-di-*tert*-butylphenol oxidation is considered, which is a waste product in hydrocarbons desulfurization process, particularly in the butane fraction. The conversion and selectivity of the oxidation reaction of 2,6-di-*tert*-butylphenol in the presence of the proposed catalyst were investigated also. The scheme of oxidation of 2,6-di-*tert*-butylphenol with dimethylsulfoxide into 3,3',5,5'-tetra-*tert*-butyl-4,4'-diphenoquinone in alkaline medium through the stage of formation of 3,3',5,5'-tetra-*tert*-butylbiphenyl-4,4'-diol was suggested.

REFERENCES

- [1] Novakova I.A., Solovyeva Y.D., Novopolceva O.M., Kuchin A.V., Chukicheva I.Y., 2012; The chemical industry today (Rus.), 12: pp 25-33.
- [2] Piotrovskiy K.B., Tarasova Z.N., 1980; Khimiya, Moscow: 264 p.
- [3] Tümer M., Aslantaş M., Şahin E., Deligönül N., 2008; Spectrochim. Acta, Part A, 70: pp 477-481.
- [4] Akhmadullin R.M., Nugumanova G.N., Mukmeneva N.A., Bukharov S.V., Evtishina N.M., Sofronova O.V., Boreiko N.P., Polymer Science and Technology, 34: pp 41-44.
- [5] Akhmadullin R.M., Nugumanova G.N., Mukmeneva N.A., Buharov S.V., Evtishina N.M., Sofronova O.V., Boreiko N.L., 4',4'-Bis(2,6-di-*tert*-butylphenol), 2006; Kauchuk i rezina (Rus.), 10: pp 12-14.

- [6] Ludwig K.G., Xiao Suo Wang, Hyun Bo Kim, Shanu A., Hossain F, Aisling C., McMahon A.C., Witting P.K., 2012; *Free Radical Biology & Medicine*, 52: pp 1918–1928.
- [7] Hsiao C.W., Brumaghim J.L., 2011; V. 1083, Washington, DC: Copyright © American Chemical Society, 428 p.
- [8] Kim H.B., Shanu A., Wood S., Parry S.N., Collet M., McMahon A.C., Witting P.K., 2011; *Free Rad Res.*, 45: pp 1000–1012.
- [9] Shanu A. Parry S.N., Wood S., Rodas E., Witting P.K., 2010; *Free Rad Res.*, 44: pp 843–853.
- [10] Hong Duong T.T., Shane A., Natasha A.E., Simon J.M, Paul K. Witting P.K., 2008; *Brain Res.*, 1219: pp 8-18.
- [11] Rayner B.S., Hong Duong T.T., Myers S.J., Witting P.K., 2006; *Neurochem.*, 97: pp 211–221.
- [12] Wattenberg L.W., Coccia J.B, Lam L.K.T., 1980; *Neoplasia. cancer res.*, 40: pp 2820-2823.
- [13] Pont De Nemours E.I. and Company, Wilmington, DE (US) 2013; US 2013/0283834 A1.
- [14] Nyberg J.M., Wichita K.S., 2012; US 2012/0190902 A1.
- [15] Shanina E.L., Zaikov G.E., Mukmeneva N.A., 2003; *J. Appl. Polym. Sci.*, 87: pp 2226–2229.
- [16] Borisova M.V., Fazlieva L.K., Fokkho Zh., Promyshlennikova M.A., Cherezova E.N., Khusainov A.D., Mukmeneva N.A., 2001; *J. Appl. Chem.*, 74: pp 1546-1550.
- [17] Shanina E.L., Zaikov G.E., Mukmeneva N.A., 1996; *Polym. Degrad. Stab.*, 51: pp 51-56.
- [18] Van Dam W., McGeehan J., Miller T., Booth J., 2013; US 2013/0296202 A1.
- [19] Campbell C.B., Spala E.E., Horn W. Jr., 2013; US 2013/0157916 A1.
- [20] Bezhan D.I., Dissertation of cand. chim. nauk, 2002; Ufa, Russia, 112 p.
- [21] Akhmadullin A.G. et al, 2000; Pat. RU, 122958/04 (024306).
- [22] Buchachenko A.L., 1963; Nauka, Moskow: 172 p.
- [23] Karasch M.S., Jochi B.S., 1957; *J. Org. Chem.*, 22: pp 1439-1443.
- [24] Honshu Chemical Industry Co. Ltd., 2004; US 6835859 B2.
- [25] Wiley Organics Inc., 2004; US 6689921 B2.
- [26] Honshu Chemical Ind., 2004; JP 20040038607.
- [27] Bukharov S.V., Fazlieva L.K., Mukmeneva N.A., Akhmadullin R.M., Morozov V.I., 2002; *Zh.obstch.khim.*, 72: pp 1910-1912.
- [28] Mitsubishi Petrochemical Co., 1992; JP 4338347.
- [29] Ethyl Corporation Biphenol process, 1989; US 4847434.
- [30] ICI Americas Inc., 1984; US 4487977.
- [31] The Dow Chemical company, 1984; US 4482754.
- [32] The Dow Chemical company, 1983; US 4397785.
- [33] Ethyl Corp., Process for the production of bisphenols, 1971; Gb 1224380.
- [34] Akhmadullin R.M., Akhmadullina A.G., Agajanyan S.I., Vasilev N.V., Gavrilov N.V., 2012; *Neftepererabotka i neftekhimia (Rus.)*, 3: pp 12-13.
- [35] Kanji Omura K., Swern D., 1978; *Tetrahedron*, 34: pp 1651-1660.
- [36] Epstein W.W., Sweat F.W., 1967; *Chemical reviews*, 67: pp 247-260.
- [37] Thomas T., Tidwell T., 1990; *Organic Reactions*, 39: 83 p.
- [38] *Comprehensive organic chemistry: the synthesis and reactions of organic compounds. Sulphur, selenium, silicon, boron, organometallic compounds / Ed. by D. Neville Jones, 1979; 1323 p.*